

WESTERN LOCK® STANDING SEAM

Snap Lock Standing Seam Metal Roof Panel Available Materials: Aluminum, Copper, Corten/A606-4, Steel Available Finishes: Bare Steel, Galvalume®/Zincalume®, Galvanized, PVDF, SMP Painted

SPECIFICATIONS:

Standing Seam Metal Roofing Snap Lock **Profile Type:**

Panel With Clips And Concealed Fasteners

Rib Height:

Overall Width:

Standard: 18" **Custom Widths Available:** 12"-20" Coil Feed: 24"

Warranty: 30 year limited*

Coverage Area

Roof: 18"(Standard),

16", 14", 12" alternate widths available

Available Gauges: 24.22

Substrate: AZ 50 Minimum (Galvalume®/Zincalume®) Finish: Cool Tech® 500 - PVDF

Fasteners: Concealed **Panel Length:** 1' to 52'

Recommended Minimum Roof Slope: 3/12**

Installation: Installation over a solid substrate with or a

an underlayment between the panel and

the substrate.

TESTING AND APPROVALS:

- UL 2218A Impact Resistance Class 4
- UL 790 Fire Resistance Rating Class A, per building code
- UL 580 Wind Uplift Resistance Class 90 Construction

APPLIES TO THE FOLLOWING COLORS/FINISHES:

- Almond
- Ash Gray
- Bone White
- Burnished Slate
- Charcoal Gray†
- Colonial Red
- Copper Penny
- Dark Bronzet
- Desert Tan
- Dove Gray Mansard Brown


- Matte Black†
- Medium Bronze
- Regal Blue
- Regal Red
- Regal White†
- Sandstone
- Slate Blue
- Slate Grav
- Terracotta
- Zinc Metallic®

† Also available in 22 gauge



PROFILE:

Shown in Regal Blue

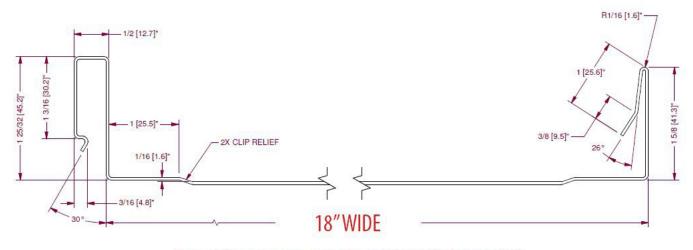

Also available are custom panel widths of: 12", 14", 16", 18", 20" and 24"

Colors represented on this profile sheet may not match actual material. All colors should be verified using an actual metal color sample.

^{*}Limited warranty. Please review prior to purchase.

^{**}For Lower Pitches Please inquire.